




**IDEAL APPLICATION
COMMERCIAL & RESIDENTIAL**

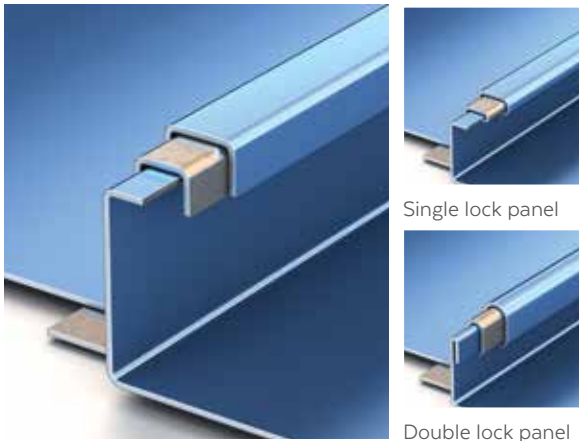


WEATHER TIGHTNESS WARRANTY APPROVED!

Our DMC 150SS roof system will lend striking dimension to any architectural design. This versatile 1-1/2” mechanically seamed panel can be curved to a wide range of radiuses and applications – from barrel roofs to conical shapes and more. Concealed fasteners and a floating clip system reduce the effect of thermal stresses on the panels, helping to maintain a beautifully smooth, uniform appearance despite fluctuations in temperature.



DMC 150SS PROFILE

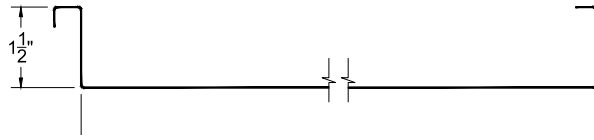

AVAILABLE WIDTHS

12", 14", 16", 18", 19" or 20"*

*Drexel Metals design pressures, wind uplifts and test reports are for specific deck attachments, material gauges, clip spacing and panel widths. A complete specification and listing is available online at www.drexelmetals.com

SUBSTRATES AVAILABLE

- Galvalume® - 24ga and 26ga
- Drexlume® - 24ga and 26ga
- Aluminum - .032"
- Copper - 16 oz and lead-coated copper
- Falzinc

PROFILE OPTIONS

- Single lock panel
- Double lock panel
- Radius panel (single or double lock)



FINISHES AND PRODUCT WARRANTY:

Available in a variety of coatings and colors by Valspar. See the Drexel Metals color card for standard colors and paint specifications.

GALVALUME® SUBSTRATE - 35 YEAR WARRANTY

35 YEAR NON PRO-RATED PVDF PAINT WARRANTY
High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

ALUMINUM SUBSTRATE - 35 YEAR WARRANTY

35 YEAR NON PRO-RATED PVDF PAINT WARRANTY
High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

DREXLUME® SUBSTRATE - 25 YEAR WARRANTY

Mill finished Galvalume® with a two-sided, clear acrylic finish.

PRODUCTION OPTIONS

Factory made or field rolled to exact lengths
Optional: striation, beads, pencil ribs

INSTALLATION

Can be installed over steel decking with PolyIso, or over plywood decking and Drexel Metals MetShield® underlayment.

SLOPE


Minimum slope 2:12

MINIMUM ROOF PITCH


2:12 - low roof pitch

TESTING

- UL 580 Wind Uplift (Class 90)
- TAS 125 Wind Uplift
- UL 1897 Extended Phase Wind Uplift
- UL 2218 Class 4 Hail Impact
- UL 790 Class A Fire Rating
- UL Environmental - SRI Third Party Verified
- ASTM E1646 Water Infiltration
- TAS 100 Wind Driven Rain
- ASTM E1680 Air Infiltration
- ASTM E1886 Missile Impact
- ASTM 2140 Static Pressure Water Head
- Miami-Dade County Approved
- Florida Building Code Approved
- Texas Department of Insurance Approval

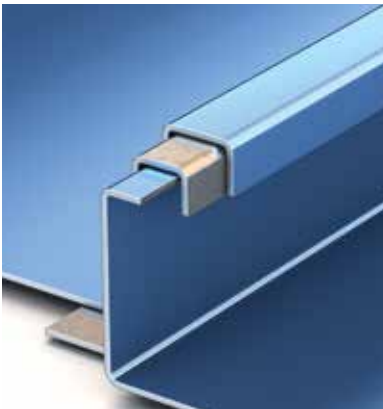

Unseamed panel



Single lock panel



Double lock panel



Testing in accordance with

