


Econo Gravel Stop

ANSI/SPRI ES-1 CERTIFIED: .032" Aluminum = 260 psf, 24GA Steel = 310 psf

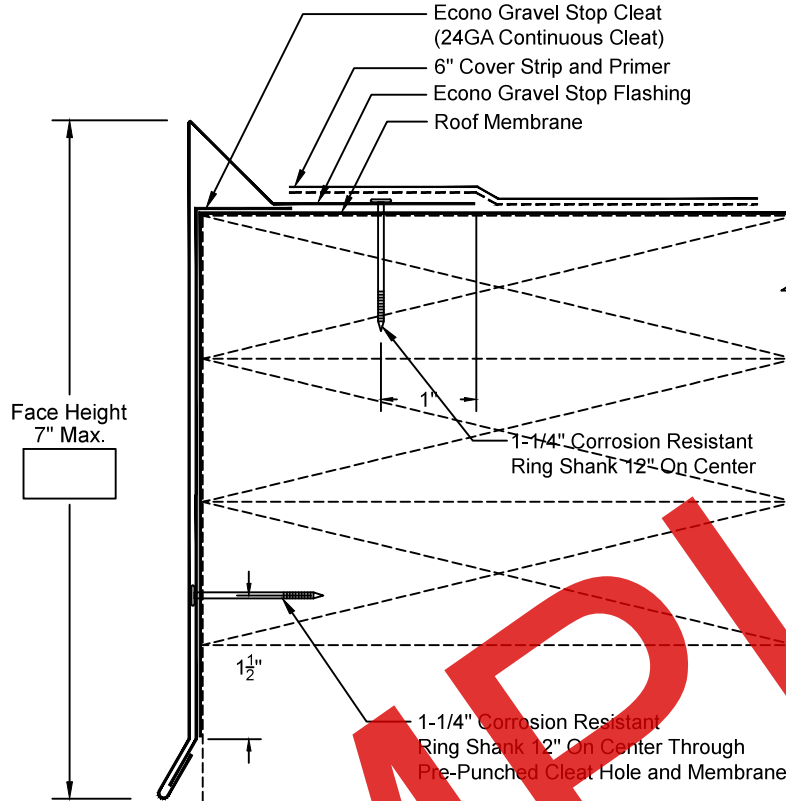

- Continuous Cleat and Fasteners provided.
- Concealed Splice Plates provided.
- Splice Plate Sealant available for extra charge.

QUANTITIES:

Linear Feet (10'-0" Lengths): _____

Outside Miters** : _____ Optional Welded (Surcharge Applies)

Inside Miters** : _____ Optional Welded (Surcharge Applies)

Right End Caps** : _____ Optional Welded (Surcharge Applies)

Left End Caps** : _____ Optional Welded (Surcharge Applies)

Splice Plate Tape Sealant: Optional Sealant (Surcharge Applies)

PRINT APPROVAL:

Architect and/or Contractor shall verify all dimensions, sizes, and quantities. All products to be installed in strict accordance with Par-Troy printed instructions.

Approved By: _____

Date: _____

** Standard riveted

PROJECT: _____

ARCHITECT: _____

ROOFING CONTRACTOR: _____

REPRESENTATIVE: _____

MATERIAL:

24GA .032" AL

Other: _____

Finish: _____

Color: _____

Effective Date: 9-1-15

Drawn By: J.S.

Approved By: B.P.



Par-Troy Metals LLC.
 122 Clinton Road
 Fairfield, NJ 07004
 PH:(973) 227-1150
 FAX:(973) 227-2757
 www.par-troy.com